

RADIAL FLOTATION TYRES (STEEL BELTED)

ATYRE
ADVANCE

HBI
TYRES & WHEELS

Head office
Hollandse Bandenmarkt Internationaal BV
Stevinweg 25 • 4691 SM Tholen • The Netherlands
T +31 (0)166 60 10 40 • F +31 (0)166 60 10 41 • info@hbi-tyres.com

HBI
TYRES & WHEELS

RADIAL FLOTATION TYRES (STEEL BELTED)


- STEEL BELTED
- LARGE CONTACT AREA
- LOW CONTACT PRESSURE
- SELF CLEANING
- ANTI-AGING SIDEWALL COMPOUND
- PERFECT LOAD DISTRIBUTION



SPECIFICATIONS

Tyre size	Pattern	Load Index	Speed Symbol	TT/TL	Rim	Overall diameter (mm)	Section Width (mm)	Inflation Pressure (BAR)	Max Speed (km/h)	Max. load (kg)	Tread depth	Static loaded radius (mm)	Rolling Circumference (mm)	R106
560/45R22.5	AR833	152	D	TL	16.00	1076	543	4	65	3550	24	484	3303	E8*106R00/ 16*1934*00
560/60R22.5	AR833	165	D	TL	16.00	1244	543	4	65	5150	25	550	3807	E8*106R00/ 16*1856*00
600/50R22.5	AR833	159	D	TL	20.00	1172	611	4	65	4375	25	521	3592	E8*106R00/ 16*1936*00
710/45R22.5	AR833	165	D	TL	24.00	1212	727	4	65	5150	25	556	3556	E8*106R00/ 16*1926*00
600/55R26.5	AR833	165	D	TL	20.00	1333	611	4	65	5150	26	616	3928	E8*106R00/ 16*1876*00
650/55R26.5	AR833	169	D	TL	20.00	1389	645	4	65	5800	26	600	4270	E8*106R00/ 16*1875*00
710/50R26.5	AR833	170	D	TL	24.00	1383	727	4	65	6000	26	630	4066	E8*106R00/ 16*1854*00
750/60R30.5	AR833	181	D	TL	24.00	1675	754	4	65	8250	26	746	5115	E8*106R00/ 16*1874*00

Other sizes on request. Other compounds on request.

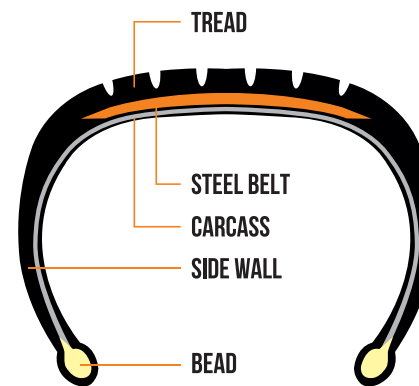

RADIAL FLOTATION TYRES FOR AGRICULTURAL MACHINERY



Head office
Hollandse Bandenmarkt Internationaal BV
 Stevinweg 25 • 4691 SM Tholen • The Netherlands
 T +31 (0)166 60 10 40 • F +31 (0)166 60 10 41 • info@hbi-tyres.com

www.hbi-tyres.com

version 2020-08